

# Thumb Screw Din 464

Product in **free-cutting steel**, black oxide finish.

Product also available in **stainless steel**.




Photo showing the stainless steel version



BOUTET introduced, in september 2009, the 1<sup>st</sup> full service e-shop for industrial components, with free access to live real-time stock levels. **SAME DAY UPS Shipping** to 45 countries, and satellite tracking of your parcels. The total customer experience.

**001**

Prototypes of special products can be manufactured upon request, usually within a week and immediately sent to your office for comment.

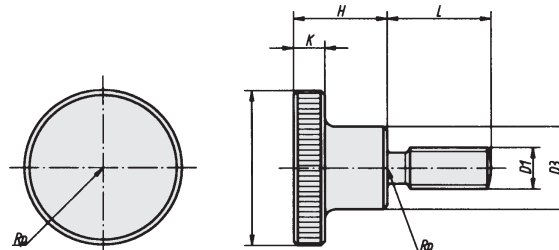

## Thumb screw knurled DIN 464

D1	D2	D3	▲ Standard length of stud L				H	K	Reference	Pack
			10	16	20	25				
M4	16	8	▲	▲	▲●	-	9,5	3,5	8661-**	10 pcs
M5	20	10	▲	▲	▲●	-	11,5	4	8662-**	10 pcs
M6	24	12	▲	▲	▲	▲●	15	5	8663-**	10 pcs
M8	30	16	-	▲	▲	▲	18	6	8664-**	10 pcs
M10	36	20	-	-	▲	▲	23	8	8665-**	10 pcs

\*\* Please fill in the length of stud L, example : 866525 for L : 25 mm.

• These versions are delivered without clearance.