

Index Plunger

without slot

Knob in polyamid filled with microscopic glass beads, allowing for high-impact resistance and durability. Standard color black.

Fastening, steel insert, strength class 5.8, black oxide finish, locking pin hardened.

Optimum utilisation between -50° and 130° Celsius, outstanding resistance to chemicals, oils as well as tough climatic conditions.

Product also available in stainless steel.



Photo : steel version and stainless steel version.


Index plunger without locking nut

D1	D	D2	L	L1	L2	L3	H	SW1	Fx30°	Reference	g
M10x1,0	5	21	47	17	7	15	5	13	1,3	8430	30
M12x1,5	6	25	56	20	8	17	6	14	1,8	8431	45
M16x1,5	8	33	74	26	10	23	8	19	2,3	8432	95
M20x1,5	10	33	80	28	12	25	10	22	2,8	8433	165


Index plunger with locking nut

D1	D	D2	L	L1	L2	H	SW1	SW2	Reference	g
M10x1,0	5	21	47	17	7	5	13	17	8420	30
M12x1,5	6	25	56	20	8	6	14	19	8421	45
M16x1,5	8	33	74	26	10	8	19	24	8422	95
M20x1,5	10	33	80	28	12	10	22	30	8423	165

D1	D2	Spring force		Resistance to shearing
		initial F1 (approx. N)	final F2 (approx. N)	
M10	21	5	12	1021N
M12	25	6	14	1470N
M16	33	15	35	2614N
M20	33	15	40	2810N

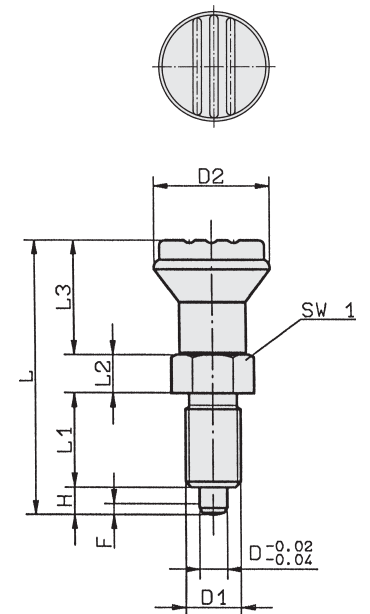

Mechanism in steel, black oxide finish



Mechanism and locking nut are in steel, black oxide finish