

Index Plunger

with slot

Knob in polyamid filled with microscopic glass beads, allowing for high-impact resistance and durability. Standard color black.

Fastening, steel insert, strength class 5.8, black oxide finish, locking pin hardened.

Optimum utilisation between -50° and 130° Celsius, outstanding resistance to chemicals, oils as well as tough climatic conditions.

Product also available in stainless steel.




Index plunger without locking nut, with slot

D1	D	D2	L	L1	L2	L3	H	SW1	Fx30°	Reference	g
M10x1,0	5	21	47	17	7	15	5	13	1,3	8251	32
M12x1,5	6	25	56	20	8	17	6	14	1,8	8252	47
M16x1,5	8	33	74	26	10	23	8	19	2,3	8253	98
M20x1,5	10	33	80	28	12	25	10	22	2,8	8254	98


Index plunger with locking nut, with slot

D1	D	D2	L	L1	L2	H	SW1	SW2	Reference	g
M10x1,0	5	21	47	17	7	5	13	17	8241	37
M12x1,5	6	25	56	20	8	6	14	19	8242	53
M16x1,5	8	33	74	26	10	8	19	24	8243	102
M20x1,5	10	33	80	28	12	10	22	30	8244	170

D1	Spring force		Resistance to shearing
	initial F1 (approx. N)	final F2 (approx. N)	
M10	5	12	1021N
M12	6	14	1470N
M16	15	35	2614N
M20	15	40	2830N

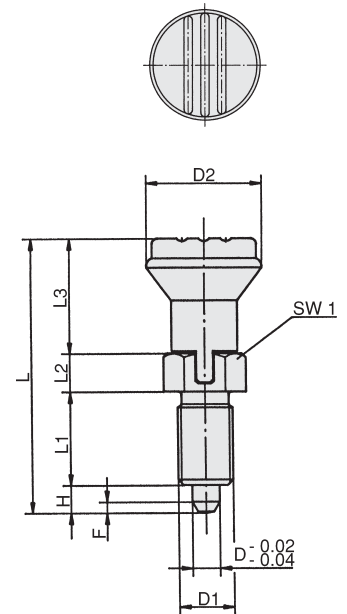

Mechanism is steel, black oxide finish



Mechanism and locking nut are in steel, black oxide finish