

Thumb Screw Knurled, Din 464

stainless steel version


Product in stainless steel X 8 CrNiS 18.9,
material 1.4305 (AISI 303), polished.



BOUTET is investing, each year, 15% of sales in Research and Development Projects. New innovative materials are under constant scrutiny.



Special types of stainless steel such as stainless 316L highly resistant to sea water, can be manufactured, upon request, in small or large batches.

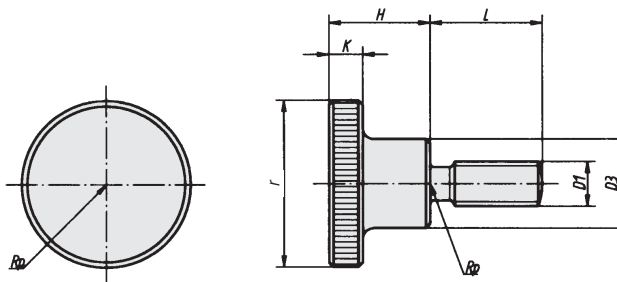

Thumb screw knurled DIN 464

D1	D2	D3	▲ Standard length of stud L				H	K	Reference	g	Pack
			10	16	20	25					
M4	16	8	▲	▲	▲*	-	9,5	3,5	8661-**i	12/15	10 pcs
M5	20	10	▲	▲	▲*	-	11,5	4	8662-**i	18/22	10 pcs
M6	24	12	▲	▲	▲	▲*	15	5	8663-**i	30/34	10 pcs
M8	30	16	-	▲	▲	▲	18	6	8664-**i	48/55	5 pcs
M10	36	20	-	-	▲	▲	23	8	8665-**i	92/102	5 pcs

** Please fill in the length of stud L, example : 866525i for L : 25 mm

• These versions are delivered without clearance.